


REST AVAILABLE COPY



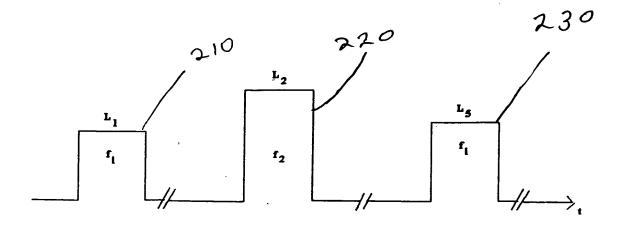

BEST AVAILABLE COPY

F16 3 MONTOR AMPLIFIER CHMATERISTIC, E. G., UOLTAGE, CUPPENT, POWER DURING ACTIVE INTERVAL OF AMPLIFIED AVERAGE AMPLIFIER CHARACTERISTIC MONITORED WITH PRIOR CHANACTERISTIE MONITURED STORE CHARACTERISTE MONTORED UPDATE STORED CHARACTERISTIC WITH NEW AVERAGE CORRECT OPEN-LOOP CONTROL SIGNAL BASED ON STORED AMPLIFIER CHRACTERIST APPLY CORRECTED OPEN-LOOP CONTROL SIGNAL TO AMPLIFIER

BEST AVAILABLE COPY

CHAPACTERISTIC AUERAGE
C,
2
C 3

BEST AVAILABLE COPY

*<u>;</u>"•